

All Rights Reserved.

Confidential




Department of Examinations - Sri Lanka

G.C.E. (A/L) Examination - 2017

20 - Information and Communication Technology

Marking Scheme

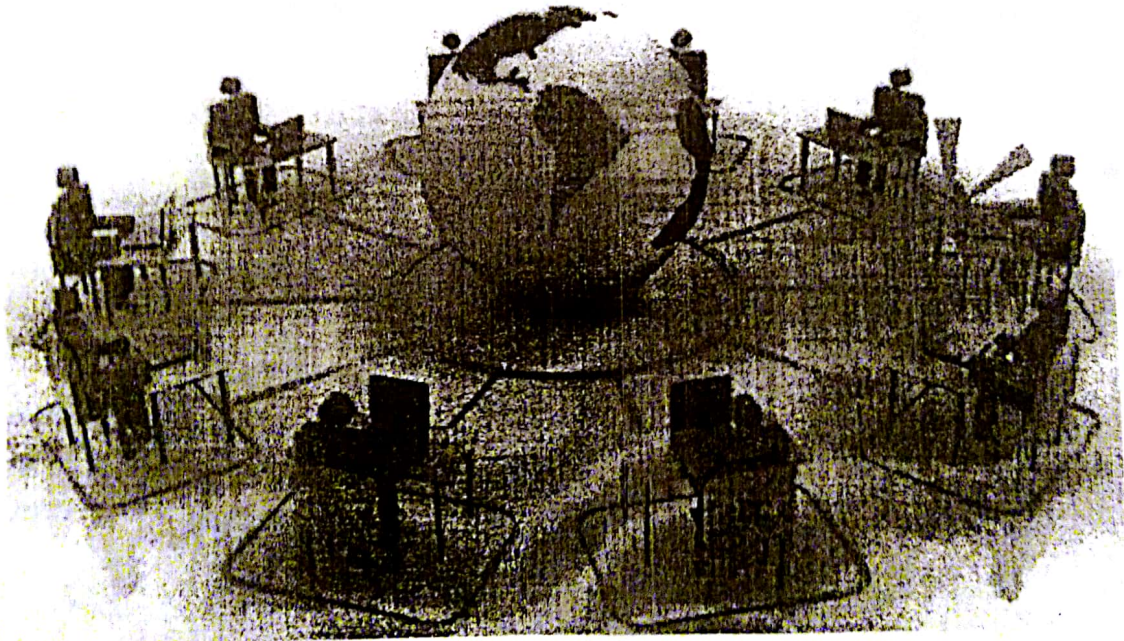

This has been prepared for the use of marking examiners. Changes would be made according to the views presented at the Chief/Assistant Examiners' meeting.

Amendments to be included.

Information and Communication Technology
Paper I
2017

Q. No.	Answer	Q. No.	Answer	Q. No.	Answer	Q. No.	Answer	Q. No.	Answer
1.	5	11.	2	21.	3	31.	4	41.	5
2.	1	12.	4	22.	4	32.	1	42.	2
3.	5	13.	All	23.	1	33.	5	43.	4
4.	4	14.	1	24.	3	34.	4	44.	5
5.	3	15.	5	25.	5	35.	5	45.	2
6.	1	16.	4	26.	2, 4	36.	5	46.	3
7.	5	17.	5	27.	1	37.	3	47.	5
8.	All	18.	3	28.	5	38.	3	48.	3
9.	1	19.	4	29.	2	39.	5	49.	5
10.	5	20.	3	30.	2	40.	2	50.	3

Information and Communication Technology (20)

Paper II Part A


2017

Q. No.	Model Answer	Marks
1.	L1 DFD of Sales Information System of Bookland	

Each blank filled in with the correct answer 1 mark

10

2.(a)	- Termination (end) of the process - Time out (end of the time slice) - Blocked for input/output operation	1 x 3 3
2.(b)	- Store the current state of the running process in the PCB. <i>reduce a mark</i> - Load the state of the process to be continued to the CPU from the PCB. <i>from full mark</i> - Transfer the control to the process to be continued.	1 2 or 0 1 4
2.(c)	- Power on self test (POST)/Executing or running BIOS - Run the bootstrap program to load the O/S to the main memory. - Transfer the control to the O/S.	1 x 3 3
3.(a).(i)	A transaction between two persons can be classified as B2B if following conditions are satisfied <i>(Interview also ok)</i> - It should be an online service/transaction. - The buyer should be a business user - The seller should be a business user	1 x 3 3
3.(a).(ii)	If the seller is replaced by a software agent, then agent represents a business user. Therefore, main proactive behavior is to take <u>actions that makes high business profit.</u> <i>1 mark only / Simplest way only</i>	2 or 0 3
3.(b).(i)	insert into student } A <i>1 mark</i> values('10001', 'Saman Kumara', '78, Mahara road, Maharagama') B C Or insert into student (student_no, name, address) values('10001', 'Saman Kumara', '78, Mahara road, Maharagama') The order of the values in the values statement should be same as the order of attributes in insert statement. Note: All names should be as in the table definition.	[A only] 1 [A and B only] 2 [A, B and C] 3 3
3.(b).(ii)	update student set address = '13, School Lane, Jaffna' } 1 mark where student_no like '10001%' } 1 mark or update student set address = '13, School Lane, Jaffna' } 1 mark where student_no like '10001%' } 1 mark	<i>2 mark</i> <i>This should be correct to get 2</i> 2 1

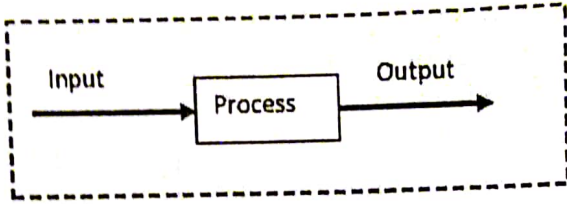	update student set address = '13, School Lane, Jaffna' where student_no = '10001' } 1mark 2 (Note: The = sign only works for varchar type attributes) Or update student set address = '13, School Lane, Jaffna' } 1mark 2 (Assumption: Only one student record in the database) } 1mark	3
4.(a).(i)	 System boundary If no table then we don't write "system boundary" If no table is writing then they should write	1
4.(a).(ii)	In closed system both Input and output are available within the system. ^{system boundary} Or A sentence with the same meaning	5 or 0 4 ~~5~~
4.(b)	person(NICNo) mobilePhone(TelephoneNo, NICNo) Each correct relation with attributes 1 mark Each primary key 1 mark (only if the relation is correct) OR any student in paper	2 2 4

If they have only table (1)
primary key is there then
we will give (2)
7

Small correct (1)
5
without any other table.

Information and Communication Technology (20)
Paper II Part B
2017

Q. No.	Model Answer	Marks																																				
1.(a)	Air-conditioner (Q) [Define output] <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>A</th><th>B</th><th>C</th><th>Q</th></tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>0</td></tr> </tbody> </table> [Correct input columns + 8 combinations] 1+1 [Correct output column] 2 $Q = A'.B.C' + A.B.C'$ $= B.C'.(A'+A)$ $= B.C'$ distributive law } complement law } [Boolean expression] 3 [At least one correct rule] 1 [Solution] 1 [Circuit] 3 or 0	A	B	C	Q	0	0	0	0	0	0	1	0	0	1	0	1	0	1	1	0	1	0	0	0	1	0	1	0	1	1	0	1	1	1	1	0	13
A	B	C	Q																																			
0	0	0	0																																			
0	0	1	0																																			
0	1	0	1																																			
0	1	1	0																																			
1	0	0	0																																			
1	0	1	0																																			
1	1	0	1																																			
1	1	1	0																																			
1.(b)	Yes. Input that represents Switch (A) is not in the Boolean expression/circuit/solution. Therefore, it is not required for the operation of the air-conditioner.	1 1 2																																				

2. Assume that the entire private address range is used (it can be any range)

Since there are 4 subnets, it is required to divide the address range into 4 segments.

For this, add two more bits to the subnet mask.

Subnet mask length becomes 10.

11111111.11000000.00000000.00000000


Therefore, the 4 subnets would be:

- | | | |
|--|-----------|---|
| 1. 00001010.00000000.00000000.00000000 = 10.0.0.0/10 | } [1 x 4] | 4 |
| 2. 00001010.01000000.00000000.00000000 = 10.64.0.0/10 | | |
| 3. 00001010.10000000.00000000.00000000 = 10.128.0.0/10 | | |
| 4. 00001010.11000000.00000000.00000000 = 10.192.0.0/10 | | |

(If they decide to use /24 ranges, they should assume that 255 addresses are enough for each subnet. Then they should show the selection of /24 ranges.)

Note: If the selected ranges are shown in the diagram these 4 marks can be given

Needed Devices: 05 Hubs, Switch, Router, Firewall, Web Server, Mail Server, Proxy server, Application Server.

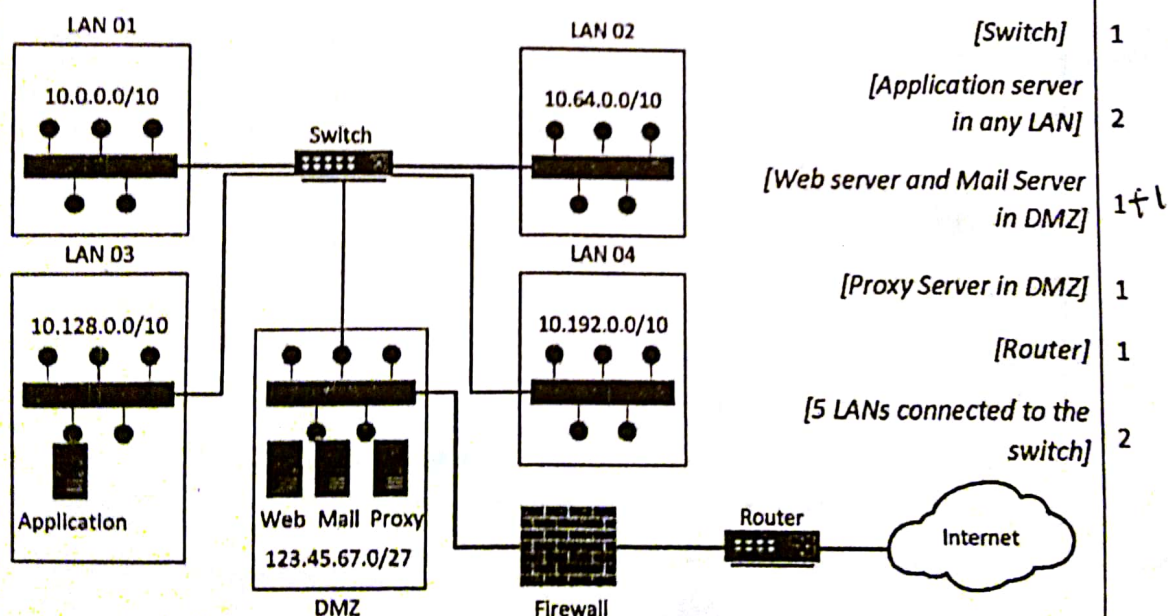

Since any computer in any subnetwork can access resources in all subnetworks, the application server can be established in any subnetwork. Since it is for internal clients, it should not be located in the DMZ.

Note: 1. Proxy Server could be directly connect to the Switch

When the packet goes to the proxy server, its source IP address is rewritten with the public IP address of proxy server.

2

3.(a)	G2C or Government to Consumer/ <i>Citizen</i>	3	3
3.(b)	G2B or G2E, It is a service provided in online by the Government to Business or Employees.	1 1	2
3.(c)	Because it is a service provided by business to government. Therefore it is B2G.	4 1	5
3.(d)	Law: To prepare fine calculations mechanism according to the (<i>criticality of the identified place</i>). Epidemic Control Division: (To develop formula to measure the <i>criticality of the identified place related to dengue breeding</i>).	3 2	5

A.(a)

4.(a)	<pre> graph TD Start([start]) --> Read[/Read house hold no (hno) Past Reading (rpast) Present Reading (rpresent)/] Read --> CalcUnits[unitsUsed = rpresent - rpast payment = 0] CalcUnits --> Decision{unitUsed > 64?} Decision -- no --> CalcPaymentNo[payment = unitsUsed * 5.00] Decision -- yes --> CalcPaymentYes[payment = 64 * 5.00 + (unitUsed - 64) * 10.00] CalcPaymentNo --> Print[/print payment/] CalcPaymentYes --> Print Print --> End([end]) </pre>	[Input] 1 [Calculation] 1 [Condition] 1 [Calculation] 1 [Calculation] 1 [Print] 1 [Correct diagram] 1 7
4.(b)	<pre> hno = input("Enter house hold number ->") rpast = int(input("Last meter reading ->")) rpresent = int(input("Present meter reading ->")) unitsUsed = rpresent - rpast if unitsUsed > 64: payment = 64 * 5.00 + (unitsUsed - 64) * 10.00 else: payment = unitsUsed * 5.00 print(payment) </pre> Assumptions : The assumptions are based on the programme - The present meter reading is higher than the past meter reading - Integer values should be entered for present and past meter readings	{Input} 1 {if with correct computation} 1 {else with correct computation} 1 {Print} 1 4
4.(c)	<pre> def writetofile(houseNo,rpast,rpresent,charge): f = open("deb.txt","a") print(houseNo,rpast,rpresent,charge,file=f,sep=",") f.close() Note: f.write(str(houseNo)+ " " + str(rpast)+ " " + str(rpresent) + " " + str(charge)) f.write("%s %s %s %s" % (houseNo,rpast,rpresent,charge)) </pre>	1 1 1 1 4

6.(a)	<pre> <html > <head> <meta charset="utf-8"> <title>Information</title> <style> OR <style type="text/css"> li{ font-family: calibri; font-size: 14pt; color: red; list-style: square; } </style> OR <link rel="stylesheet" type="text/css" href="def.css"> </head> <body> <h1>Student Art Competition</h1> <h2>Theme: Litter on the environment </h2> <h3>PRIZES</h3> 1st place Rs. 10,000/= 2nd place Rs. 7,500/= 3rd place Rs. 5,000/= <h3>ENTRY FORM</h3> <p>Please fill and submit this online entry form to enter the competition. </P> </body> </html> </pre>	4 2 1 2 9
-------	--	--

